

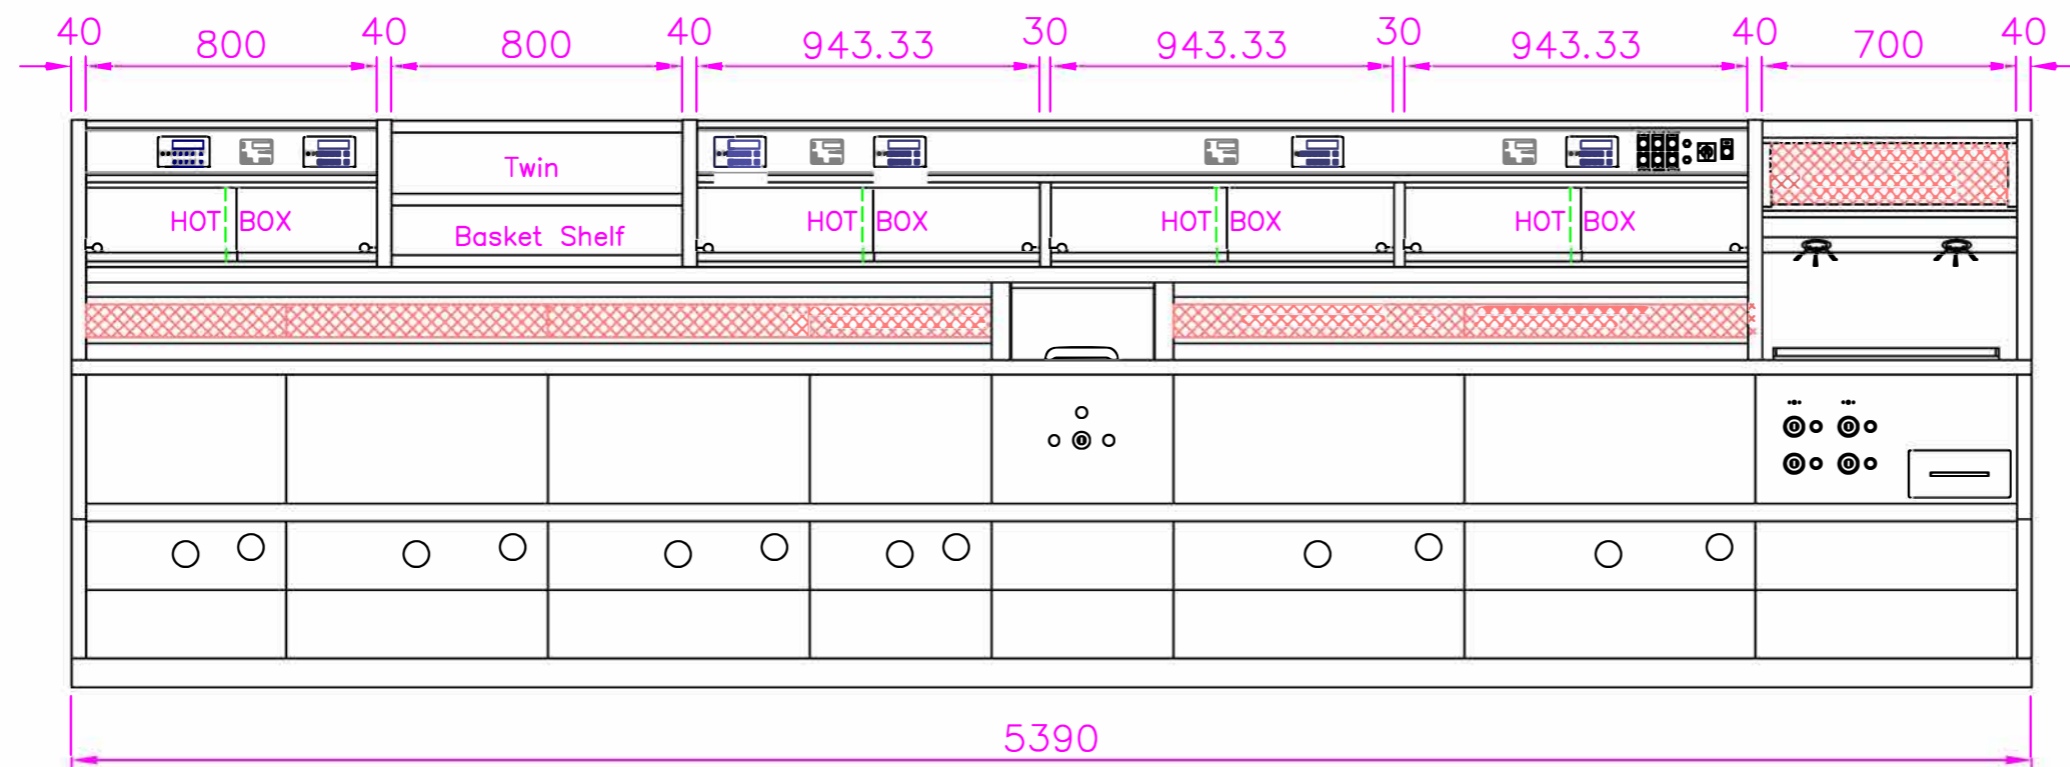


CTO

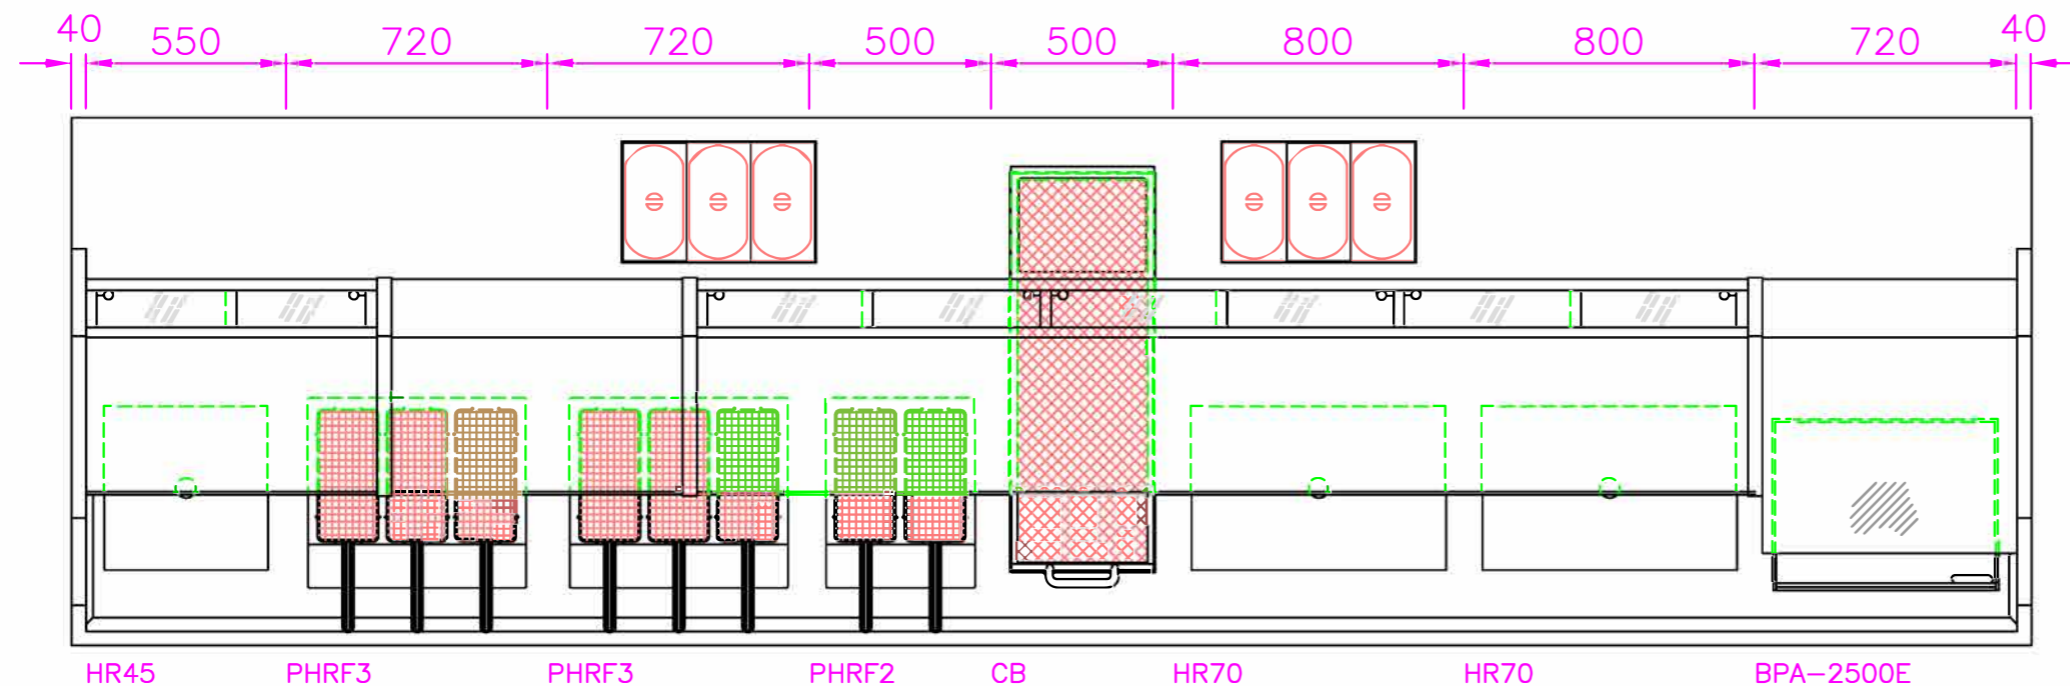

All products of Qbtec are provided with a grounding point.  
**Electrical information of range:**  
 5 circuit breaker(s) of 230 V  
 1 circuit breaker(s) of 400 V 16A  
 0 circuit breaker(s) of 400 V 32A  
 0 circuit breaker(s) of 400 V 63A  
 1 separate cable(s) of 400 V  
**Other specifications:**  
 Energy : Natural Gas  
 Position electric boxes : Front  
 Position gas connection : Under  
 Position extraction : Under  
 Position waste oil drain : Rear

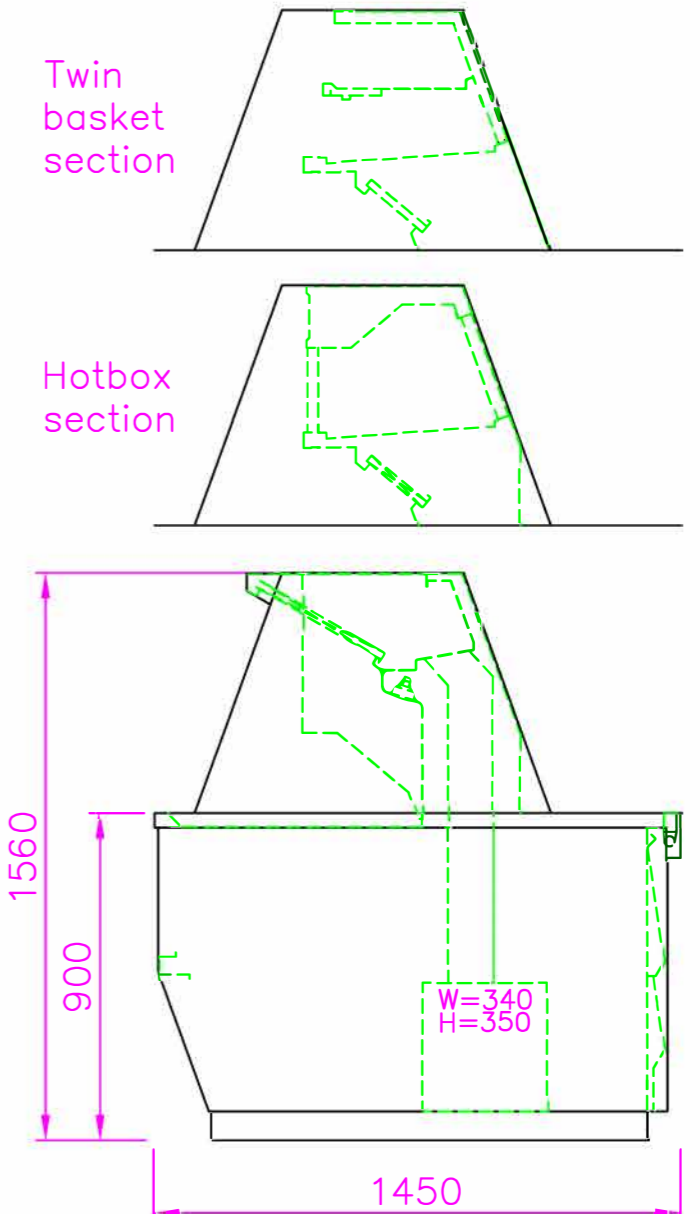

Island range Jubilee (front)

Code	Description	Voltage	P elek/kW	P Gas/kW
HR45	H.E. flat bottom 450x450mm	230V	0.05	17.50
PHRF3	H.E. 3 basket chippan	230V	0.10	35.00
PHRF3	H.E. 3 basket chippan	230V	0.10	35.00
PHRF2	H.E. 2 basket chippan	230V	0.10	30.00
CB	Chipbox	230V	2.20	
HR70	H.E. flat bottom 700x450mm	230V	0.05	25.00
HR70	H.E. flat bottom 700x450mm	230V	0.05	25.00
BPA-2500 E	Adieu griddle 2500 E	400V	6.00	
BM 1/1	Bain Marie 1/1 GN	230V	2.00	
BM 1/1	Bain Marie 1/1 GN	230V	2.00	
	Cabinets	230V	3.60	
	Range	230V	2.50	
	<b>Total</b>			<b>167,50</b>

- Downlight color: Blue
- Including oil filtration system, no return to HR45 from filter drawer
- Hotbox above HR45 to drain into HR45

Copyright reserved in accordance with the law	Drawing is not to scale and can be subject to change	Customer:		Agent: KFE
		Am.proj.	Drawing no.: 1808-44012	
		Tol: 5mm	Date: 19-3-2019	
		Drawn by: HD		

KIREMKO

QBTEC  
 Middellandse Zee 9  
 3446 CG, Woerden  
 The Netherlands  
 Tel: +31 (0)348-475555  
 Fax: +31 (0)348-418495  
 www.qbtec.nl

Approval: